



**Yitong Filter Machinery Co., Ltd.**

Focusing on providing the most extensive filtration solutions for global customers in 16 years

## **Overturn titanium filter housing**

Materials of Construction: 304, 316L stainless steel

Shell O-rings: Silicone rubber, EPDM, Fluorine

Surface finish: 0.3-0.4 micron

Connection of the housing: Flange connector

Connector of the pressure gauge: Threaded Adaptor

Connector of the filter cartridge: 222, 226, or Threaded Adaptor

Connection of the inlet and exhaust: flange connector or Clamp Coupling

Customized: YES

### **Product Description:**

Yitong reversible stainless steel filteris suitable for pharmaceutical and different industries. The reversible design helps to remove the residue and makes it is convenient to take apart. The 100% 304 or 316 stainless steel structrue makes it is corrosive-resitant, and gives a loonger service life. After being processed by the polishing tech, the rust problem can be solved very well.

Tel: +86 311 6668 5297

Mob: +86 180 3376 5689

Fax: +86 311 6668 5290

E-mail:manager@yitong-filter.com


WhatsApp:+86 180 3376 5689

WeChat: +86 180 3376 5689



## Yitong Filter Machinery Co., Ltd.

Focusing on providing the most extensive filtration solutions for global customers in 16 years

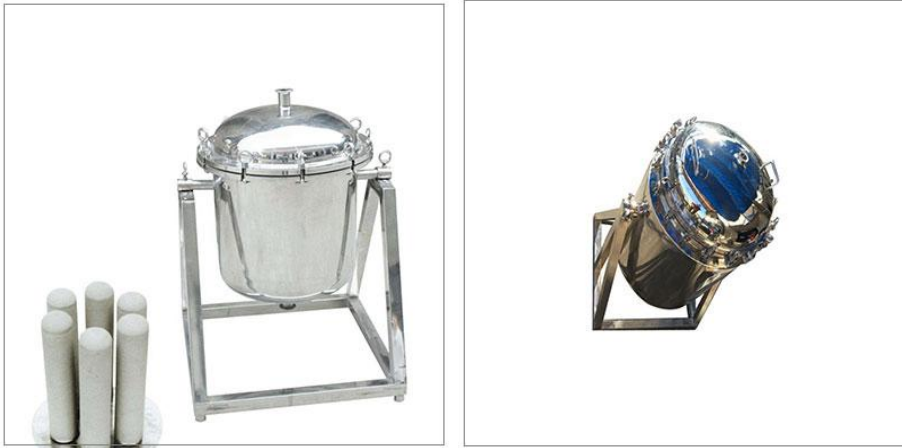

### Performance Feature:

- 1.The overturn titanium filter housing shell can turn 180°, the solid impurity particles of the cartridge external can be drained completed.
- 2.The overturn titanium filter housing faceplate can be made into a detachable type, to achieve thorough cleaning. We can add wheels at the bottom of the filter to move it conveniently

### Application:

Bag filter housing is suitable for the pre-filtration and rough filtration of the fluids with a certain content of solids, usually applied in the high flow rate filtration and security filtration.

Tel: +86 311 6668 5297

Mob: +86 180 3376 5689

Fax: +86 311 6668 5290

E-mail: [manager@yitong-filter.com](mailto:manager@yitong-filter.com)

WhatsApp: +86 180 3376 5689

WeChat: +86 180 3376 5689



## Yitong Filter Machinery Co., Ltd.

Focusing on providing the most extensive filtration solutions for global customers in 16 years

### Technical Parameter:

Materials of Construction	304, 316L stainless steel
Shell O-rings	Silicone rubber, EPDM, Fluorine
Surface finish	0.3-0.4 micron
Connection of the housing	Flange connector
Connector of the pressure gauge	Threaded Adaptor
Connector of the filter cartridge	222, 226, or Threaded Adaptor
Connection of the inlet and exhaust	flange connector or Clamp Coupling
Customized	YES

### Packing and shipping:



Tel: +86 311 6668 5297

Mob: +86 180 3376 5689

Fax: +86 311 6668 5290

E-mail: [manager@yitong-filter.com](mailto:manager@yitong-filter.com)

WhatsApp: +86 180 3376 5689

WeChat: +86 180 3376 5689



## Yitong Filter Machinery Co., Ltd.

Focusing on providing the most extensive filtration solutions for global customers in 16 years

### FAQ:

Q: How can we get the quotation of filter cartridges ?

A: Kindly please let us know the specifications,such as the material,length,micron,adapter,apply in which industry.....

Q: What's the minimal quantity order ?

A: 1 piece

Q:How longabout your delivery ?

A: The order is always arranged in 10 working days as soon as receiving your payment.

Q: Is customized service available ?

A: Yes, we offer customized service

Q: How about payment terms ?

A: We accept L/C, T/T, Escrow, Paypal or as your requirement

Tel: +86 311 6668 5297

Mob: +86 180 3376 5689

Fax: +86 311 6668 5290

E-mail:manager@yitong-filter.com

WhatsApp:+86 180 3376 5689

WeChat: +86 180 3376 5689